

1. GENERAL DESCRIPTION AND SCOPE

This specification is for Model# ATEC-24V1100-PDB-M, AC-line powered switching power supply. It features Active PFC (Power Factor Correction) circuits with Full Range Input features, and meets EN61000-3-2.

The specification contained is intended to describe in detail the functions and performance of this product. Any comment or additional requirements to this specification from our customers will be highly appreciated and treated as new target for us to approach.

2. REFERENCE DOCUMENTS

The subject power supply meets the EMI requirements and obtain main safety approvals as following:

2.1 EMI REGULATORY

- FCC Part 15 Subpart J, Class 'B' 115 Vac operation.
- CISPR 22 Class 'B' 230 Vac operation.

3. PHYSICAL REQUIREMENTS

3.1 MECHANICAL SPECIFICATIONS


The mechanical drawing of the subject power supply, which indicates the form factor, location of the mounting holes, location, the length of the connectors, and other physical specifications of the subject power supply. (Please refer to the attachment drawing).

3.3 CONNECTOR PIN DESIGNATIONS

The pin designations and color codes are defined as follows:

ATEC-24V1100-PDB-M Output Pin Assignment														
Pin	P1	P5	J1	J2	J3	J4	J5	J6	J7	J8	J9	J10	J11	J12
1	+3.3V	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	+12V
2	+3.3V	GND	GND	GND	GND	GND	GND	GND	GND	GND	+24V	+24V	+24V	GND
3	GND	GND	+12V	+12V	+12V	+12V	+12V	+12V	GND	GND				GND
4	+5V	GND	+12V	+12V	+12V	+12V	+12V	+12V	GND	+5V				+5V
5	GND	GND							+12V	+5V				
6	+5V	GND							+12V	-12V				
7	GND	+12V							+12V					
8	PG	+12V							+12V					
9	+5Vsb	+12V							+12V					
10	+12V	+12V												
11	+12V	+12V												
12	+3.3V	+12V												
13	+3.3V													
14	-12V													
15	GND													
16	NC													
17	GND													
18	GND													
19	GND													
20	NC													
21	+5V													
22	+5V													
23	+5V													
24	GND													

USB-A : 5V 2.4A
USB-C : 5V 3.0A

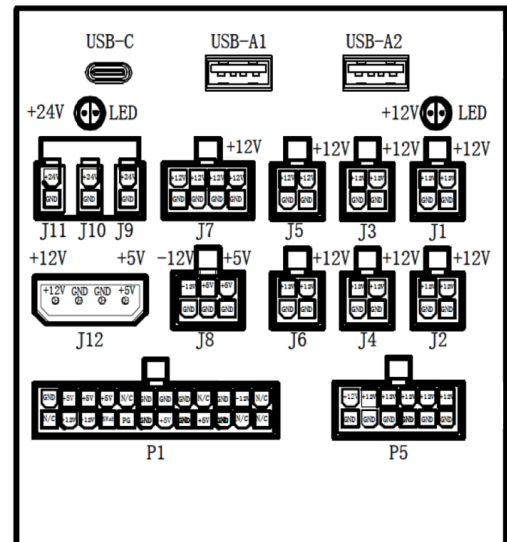

4. ELECTRICAL REQUIREMENTS

4.1 OUTPUT ELECTRICAL REQUIREMENTS

The subject power supply will meet all electrical specifications as below, over the full operation temperature range and dynamic load regulation.

4.1.1. OUTPUT RATING

AC INPUT		110 - 240Vac 60 / 50 Hz 12.0 A - 5.6A				
DC Output		5.0V	12V	+24V	-12V	5Vsb
1100W	Max (A)	18A	80A	12A	0.5A	3A
	Min (A)	0A	0A	0A	0A	0A
	Total Max. Power	1100W				

- (1) Total output for this subject power supply is 1100 watts.
- (2) Ripple and noise measurements shall be made under all specified load conditions through a single pole low pass filter with 20MHz cutoff frequency. Outputs shall be passed at the connector with a 0.1uF ceramic disk capacitor and a 47uF electrolytic capacitor to simulate system loading.

4.1.2. HOLD-UP TIME (@FULL LOAD)

115V / 60Hz : 16.5 Sec. Minimum.

230V / 50Hz: 17 mSec. Minimum

4.1.3.OUTPUT RISE TIME

(10% TO 90% OF FINAL OUTPUT VALUE, @FULL LOAD)

115V rms or 230V rms + 5Vdc : 20ms Maximum

4.1.4.SHORT CIRCUIT PROTECTION

Output short circuit is defined to be a short circuit load of less than 0.1 ohm.

In the event of an output short circuit condition on +24V, +5V or +12V, -12V output, the power supply will shut down and latch off without damage to the power supply. The power supply shall return to normal operation after the short circuit has been removed. Meanwhile, after disconnecting the AC power to draw a line on the time of not less than 5 seconds.

4.1.5.OVERLOAD PROTECTION

OPP protection, protection for the full load range of 110% - 150%

The overload protection must be such that the power supply is protected from damage by entering a shutdown condition.

4.2. INPUT ELECTRICAL SPECIFICATIONS**4.2.1. VOLTAGE RANGE**

PARAMETER		UNITS
V in Range	100 240	V rms

4.3.2. INPUT FREQUENCY

INPUT FREQUENCY	50 60Hz
-----------------	---------

4.3.3. INRUSH CURRENT

(Cold start -25 deg. C)

115V	No damage
230V	No damage

(No damage)

4.3.4. INPUT LINE CURRENT

115V	12.0 Amps rms maximum
230V	5.6 Amps —rms maximum

TELSTAR ELECTRONICS CORP.

9025 ETON AVE. STE A, CANOGA PARK, CA91304

TEL 818-882-2018 FAX 818-882-5137

Email Address: sales@telstarcorp.com

Web Address : www.telstarcorp.com

4.3.5 AC Line Transient Specification

AC line transient conditions shall be defined as “sag” and “surge” conditions.

“Sag” conditions are also commonly referred to as “brownout”,

these conditions will be defined as the AC line voltage dropping below nominal voltage conditions.

“Surge” will be defined to refer to conditions when the AC line voltage rises above nominal voltage.

The power supply shall meet the requirements under the following AC line sag and surge conditions.

Table 11 – AC Line SAG transient performance.

AC Line Sag (10sec interval between each sagging)				
Duration	Sag	Operating AC voltage	Line frequency	Performance criteria
0 to 1/2 AC cycle	95%	Nominal AC voltage	50/60Hz	No loss of function or performance
>1 AC cycles	>30%	Nominal AC voltage	50/60Hz	Loss of function acceptable, self-recoverable

Table 12 – AC Line SURGE transient performance.

AC Line Surge				
Duration	Surge	Operating ac voltage	Line frequency	Performance criteria
Continuous	10%	Nominal AC voltage	50/60Hz	No loss of function or performance
0 to 1/2 AC cycle	30%	mid-point of nominal AC voltage	50/60Hz	No loss of function or performance

4.4. EFFICIENCY

	Full load (100%)	Typical load (50%)	Light load 20%
115VAC	80%	80%	80%
230VAC	80%	80%	80%

TELSTAR ELECTRONICS CORP.

9025 ETON AVE. STE A, CANOGA PARK, CA91304
TEL 818-882-2018 FAX 818-882-5137

Email Address: sales@telstarcorp.com
Web Address : www.telstarcorp.com

5.ENVIRONMENTAL REQUIREMENTS

The power supply will be compliant with each item in this specification for the following Environmental conditions.

5.1. TEMPERATURE RANGE

Operating	1100W	0 to +50 deg. C
Storage		20 to +80 deg. C

5.2. HUMIDITY

Operating	5	90% RH, Non	condensing
Storage	5	95% RH, Non	condensing

5.3. VIBRATION

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Vibration Operating - Sine wave excited, 0.25 G maximum acceleration, 10-250 Hz swept at one octave / min. Fifteen minute dwell at all resonant points, where resonance is defined as those exciting frequencies at which the device under test experiences excursions two times large than non-resonant excursions.

Plane of vibration to be along three mutually perpendicular axes.

5.4. SHOCK

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Storage 40G, 11 mSec. half-sine wave pulse in both directions on three mutually perpendicular axes.

Operating 10G,11 mSec. half-sine wave pulse in both directions on three mutually Perpendicular axes.

TELSTAR ELECTRONICS CORP.

9025 ETON AVE. STE A, CANOGA PARK, CA91304
TEL 818-882-2018 FAX 818-882-5137

Email Address: sales@telstarcorp.com
Web Address : www.telstarcorp.com

6. LABELLING

Label marking will be permanent, legible and complied with all agency requirements.

6.1. MODEL NUMBER LABEL

Labels will be affixed to the sides of the power supply showing the following:

- Manufacturer's name and logo.
- Model no., serial no., revision level, location of manufacturer. - The total power output and the maximum load for each output. - AC input rating.

6.2 DC OUTPUT IDENTIFICATION

Each output connector will be labeled.

7. RELIABILITY

7.1. MTBF

The power supply have a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC input voltage.

TELSTAR ELECTRONICS CORP.

9025 ETON AVE. STE A, CANOGA PARK, CA 91304
TEL 818-882-2018 FAX 818-882-5137

Email Address: sales@telstarcorp.com
Web Address : www.telstarcorp.com

ATEC-24V1100-PDB-M

